



Altius Handcrafted Firearms
Aperture Extension and Blinder Installation Instructions


- 1) Remove Rear Diopter

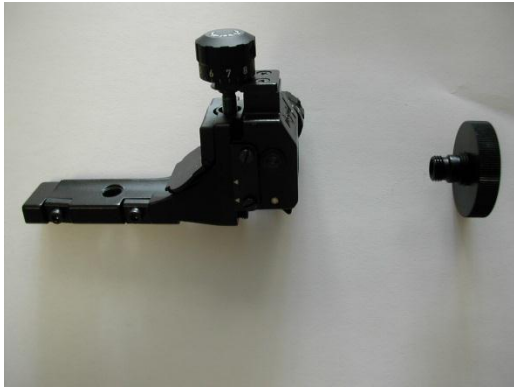

- 2) Separate Locking Ring from Aperture Extension

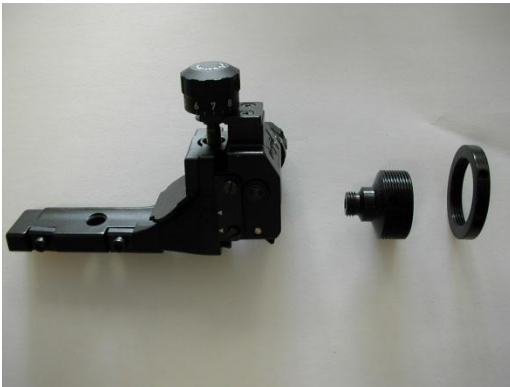


- 3) Install aperture extension finger tight

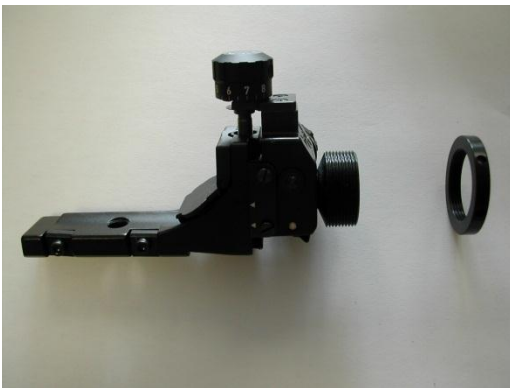

Altius Handcrafted Firearms
Aperture Extension and Blinder Installation Instructions

- 4) Re-install locking ring

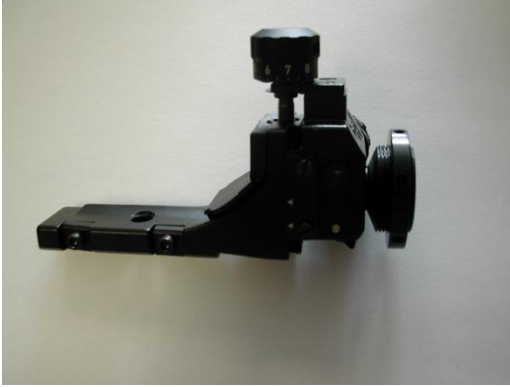

- 5) Install Factory diopter through blinder and thread into Aperture Extension. Note that blinder may need to be trimmed for best fit. Placing the included rubber washer between the metal backing plate and the aperture extension may help to keep the blinder from rotating during use. For the Izhmash sight it may also be helpful to place the included black steel washer between the rubber eye cup and the blinder to create more tension.



- 6) Use a 1/8" drift punch or similar to tighten locking ring against blinder



- 7) The Aperture Extension is also equipped with 1/8" holes so that a second drift punch may be used to keep it from counter-rotating while tightening the locking ring